


E1XF Ex d IIC / Ex e II

KCA473 Series



The E1XF is a hazardous area gland that is a dual seal high performance cable gland suitable for braided cable.

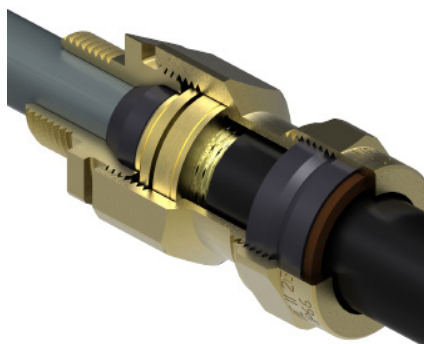

Features and benefits:

- Brass indoor and outdoor cable gland for use in hazardous areas
- Suitable for circular, Braid wire armour cables with extruded polymeric bedding and oversheath
- Achieves IP66 seal onto cable and to enclosure with suitable sealing washer or thread sealant
- Three part armour lock provides mechanical cable retention and electrical continuity
- Inner PCP seal grips cable bedding and provides additional ingress protection
- Suitable for most climatic conditions - weatherproof and waterproof
- Standard and Nickel plated versions available
- Full Installation Instructions supplied

Kit comprises

E1XF Gland
Brass Earth Tag
Brass Locknut
Nylon Sealing Washer
PVC Shroud

(2 per kit up to and including 25mm size)



Technical Information:

Certified II 2GD, Ex e II & Ex d IIC under ATEX directive 2014/34/EU

Atex Compliance Standards: EN 60079-0, EN 60079-1, EN 60079-7, EN 61241-0, EN 61241-1

Certificate number Sira 02ATEX3092X

IECEx Compliance Standards: IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 61241-0, IEC 61241-1

Certificate number IECEx SIR 10.0071X

Service temperature range -60°C to +90°C

May be used in:


- Zones 0, 1 & 2 with Ex ia IIA, B & C equipment
- Zones 1 & 2 with Ex ib IIA, B & C equipment
- Zones 1 & 2 with Ex e II equipment
- Zones 2 with Ex nA II equipment
- Zone 21 & 22 with Ex tD A21

Where the cable is effectively filled, may Also be used in:

- Zones 1 & 2 with Ex d IIC equipment not containing a source of ignition & with a volume less than 2000cm³
- Zones 1 & 2 with Ex d IIA & Ex d IIB equipment not containing a source of ignition & with any volume
- Zone 1 with Ex d IIA & Ex d IIB equipment containing a source of ignition & with a volume less than 2000cm³
- Zone 2 with Ex d IIA & Ex d IIB equipment containing a source of ignition & with any volume
- Zone 2 with Ex nR II equipment

Specifications

Gland Kit Reference		Cable Dimensions mm						Gland Dimensions mm					
Design Reference		Size	Qty Per Kit	Under Armour Ø (A)		Overall Ø (B)		Braid Armour Wire ø	Entry Thread (D)	Thread Length (E)	Protrusion Length (F)	Hexagon	
Standard	Nickel Plated			Min	Max	Min	Max					A/F (G)	A/C (H)
KCA473-51	KCA473-51V	16	2	3.8	8.7	8.0	13.2	0.2/0.3	M16 × 1.5	15	41	23.4	26.7
KCA473-71	KCA473-71V	20SS	2	3.8	8.7	8.0	13.2	0.2/0.3	M20 × 1.5	15	41	23.4	26.7
KCA473-52	KCA473-52V	20S	2	8.0	11.8	8.0	15.8	0.2/0.3	M20 × 1.5	15	43	25.7	29.2
KCA473-53	KCA473-53V	20	2	11.8	14.2	11.7	20.8	0.2/0.3	M20 × 1.5	15	43	30.5	34.0
KCA473-55	KCA473-55V	25	2	14.0	20.1	17.0	27.2	0.3/0.45	M25 × 1.5	15	48	37.6	42.2
KCA473-56	KCA473-56V	32	1	19.7	26.6	23.5	33.5	0.3/0.45	M32 × 1.5	15	53	47.2	53.6
KCA473-57	KCA473-57V	40	1	26.6	32.4	29.0	39.9	0.3/0.45	M40 × 1.5	15	56	56.4	61.5
KCA473-58	KCA473-58V	50S	1	32.4	38.4	38.0	46.2	0.3/0.45	M50 × 1.5	15	61	60.0	66.0
KCA473-59	KCA473-59V	50	1	38.4	44.3	39.5	52.6	0.3/0.45	M50 × 1.5	15	61	70.1	77.2
KCA473-60	KCA473-60V	63S	1	44.3	50.3	50.0	58.9	0.3/0.45	M63 × 1.5	15	64	75.0	83.0
KCA473-61	KCA473-61V	63	1	50.3	56.2	51.3	65.3	0.3/0.45	M63 × 1.5	15	64	80.0	87.4
KCA473-62	KCA473-62V	75S	1	56.2	62.2	62.0	71.6	0.3/0.45	M75 × 1.5	15	73	90.2	99.1
KCA473-63	KCA473-63V	75	1	62.2	68.1	62.5	78.0	0.3/0.45	M75 × 1.5	15	73	90.8	109.2

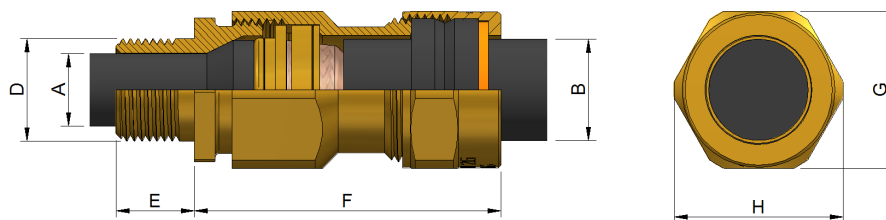

Prysmian Cables & Systems Limited,
Oak Road, Wrexham Industrial Estate, Wrexham, LL13 9PH, UK

Commercial Enquiries,
Sales Office Tel: 0845 767 8345,
International Sales Office Tel: +44 2380 295481

www.biconcomponents.co.uk

**Prysmian
Draka
General Cable**